



Cavalier


Herder.nl

Work wherever you want with the Cavalier

The Cavalier from Herder is a compact all-rounder. A reliable and solid tool carrier that you can rely on under all circumstances. Thanks to its compact dimensions, the Cavalier is versatile. No fewer than 15 different tools are available for the Cavalier.

Cavalier can be equipped with the mowing arm on the left or right side. You can choose between booms of different standard lengths with a range between 5.50 meters or 7.35 meters. For better visibility during transport on the road, you can have the Cavalier equipped with a transport position to the rear. This way, the driver's view is not obstructed by the mowing arm while driving. We will be happy to inform you about the possibilities.

- Highly cost-effective mowing arm;
- Suitable for ditch and roadside maintenance;
- Attachment on side of tractor;
- Standard arm length of 6.60 m;
- Electrically operated joystick;

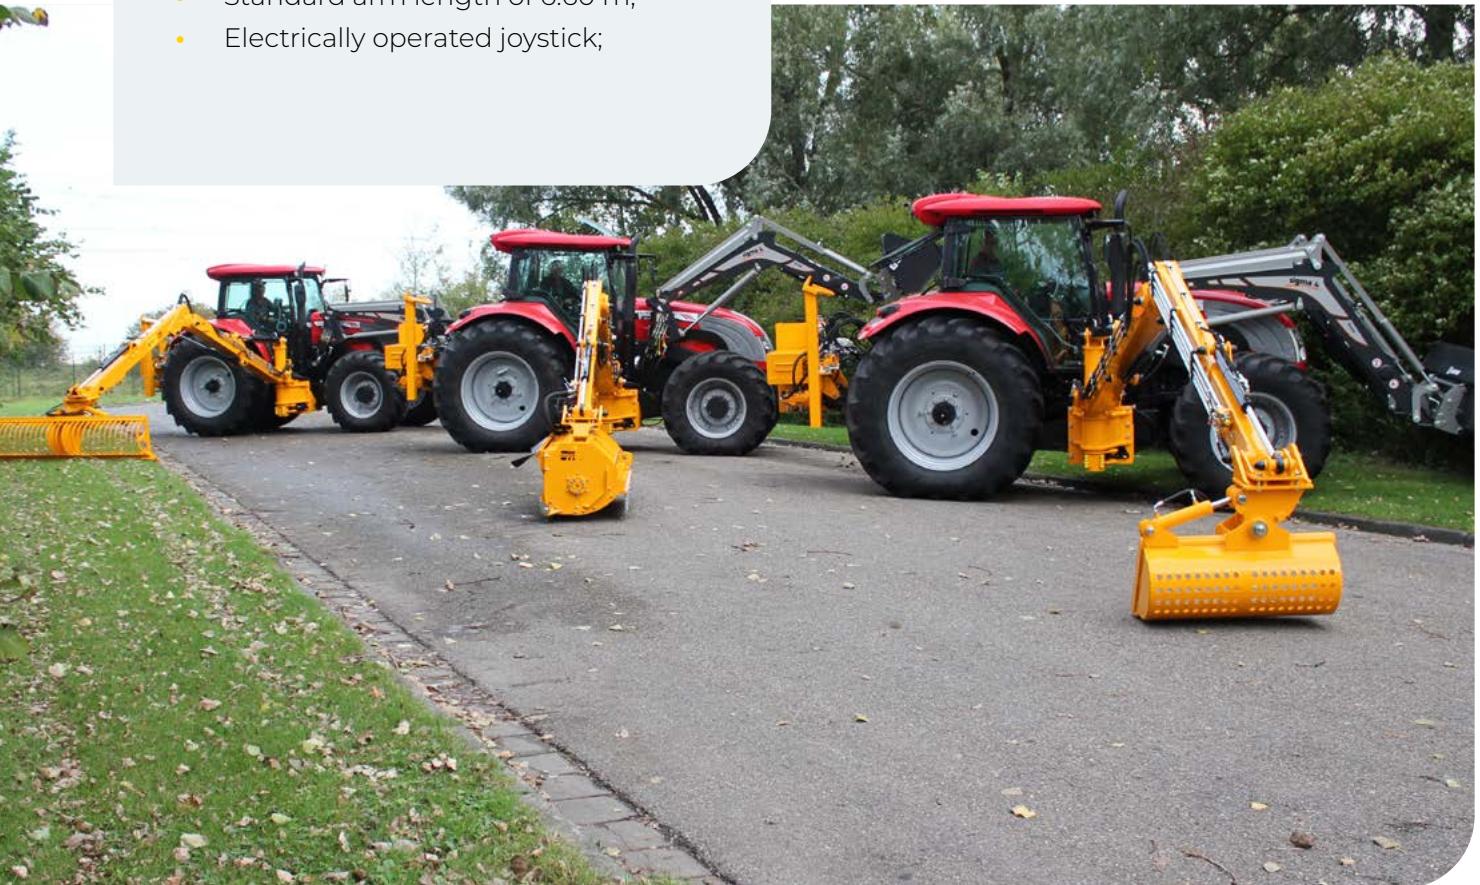

Down to the millimeter accuracy

Working with the Cavalier is an experience in itself. The operator can count on an ergonomic workplace because he can fully focus on the work. An additional advantage is that visibility is optimal under all conditions. With the joystick it is possible to operate the booms extremely accurately, this allows for fast and precise work. The control panel with color screen ensures intuitive operation.

The Cavalier is available with different swivel ranges, allowing the right boom swivel range to be chosen for all conditions.



Efficient working with ergonomic operation

Working with the Cavalier is simple and effective. Operation is easy and both the joystick and control panel are easily accessible and within easy reach. The joystick is programmed according to a logical operating sequence that makes it easy to work with. The control panel with color screen has also been carefully constructed, ensuring clear and intuitive operation.



Simple and effective is the standard





A custom Cavalier

- Front axle stabilisation is not a unnecessary luxury. Left for a fixed front axle and right for a sprung front axle;
- Simple yet functional hydraulic unit carried in the 3-point of the tractor combined with a transport support at the rear;
- Work tool carrier at the front of the attachment frame. The boom rests on this in transport position on MBK411;
- Counterweight package for added stability; Optionally, the Cavalier can be equipped with long booms and transport position to the rear for better visibility during transport (MBK420A, MKB420V or MKB420D);
- The Cavalier is available with different types of swivel columns and four different swivel range;.
- For countries where people drive on the left, the Cavalier can also be attached to the left side of the tractor.

Specifications Cavalier MBK411/420ADV

Tools 150 bar	0-60 L/min (stepless)
Tools 330 bar	90 L/min
Hoverstand	14 L/min
Steering Slide	60 L/min
Minimum tractor power	60 kW
Minimum tractor weight	4500 kg
Oil cooler	9,5 kW
Hydraulic oil tank capacity	150 l
HERDER quick-release device for tool	Optional
Lifting capacity with standard boom length	ca. 650 kg
Oil cooler	Yes
Hydraulic oil tank capacity	200 l
HERDER quiq fastener for tool	Yes
Lifting capacity with standard boom length	840 kg

Herder

Herculesweg 6, 4338 PL

Middelburg (NL)

T: +31 118 679500

E: info@herder.nl

www.herder.nl



Cavalier booms combinationss

Booms combination	Lift cylinder	Articulated cylinder	Size a
1+2	90 mm	80 mm	5,50 m
1L+2L	100 mm	80 mm	6,55 m
1L+2LS	110 mm	90 mm	7,30 m



 A Member of the **ALAMO GROUP**



Herder

Herculesweg 6, 4338 PL

Middelburg (NL)

T: +31 118 679500

E: info@herder.nl

www.herder.nl



Herder.nl